



# 4100 PROFILE

4000 Series

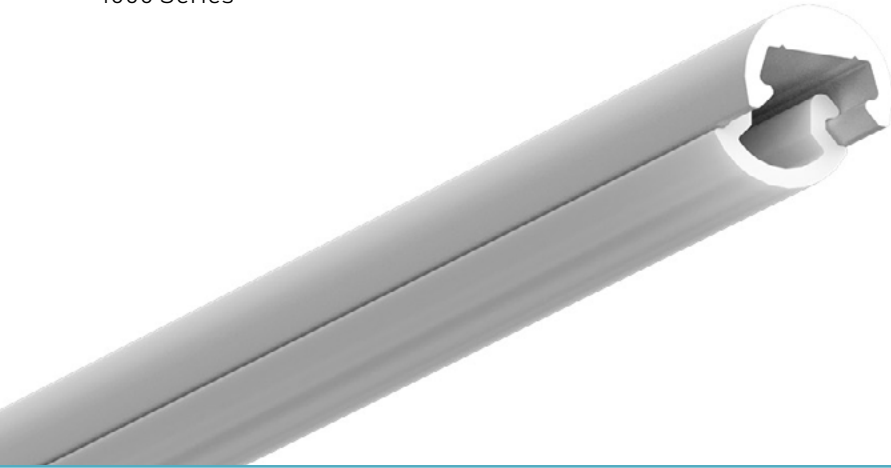

## Cross-section dimensions:

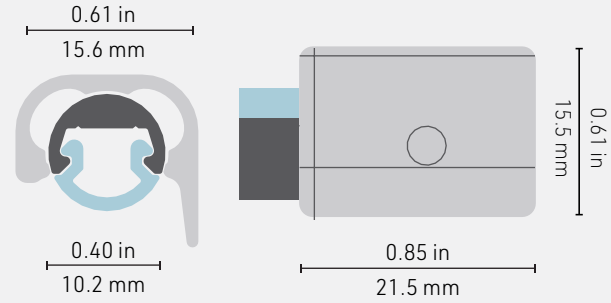

A retail lighting solution for perfectly lit display cases. The compact 4100 profile helps you focus light where it is most needed. On the products! Ideal for highlighting jewelry cases and other prized possessions.

## FEATURES

- Aluminum construction for superior heat dissipation
- Custom lengths from 12 to 96 inches
- Swivel design to point the light where it is needed
- Glare shield to conceal the light source and keep the focus on the displays
- Quick install magnetic mounting brackets.

## OPTIONS



## LED STRIP COMPATIBILITY


Compatible with LED strips up to **5mm** wide.






## LINEAR WEIGHT

0.054 lbs/ft, 0.080 kg/m
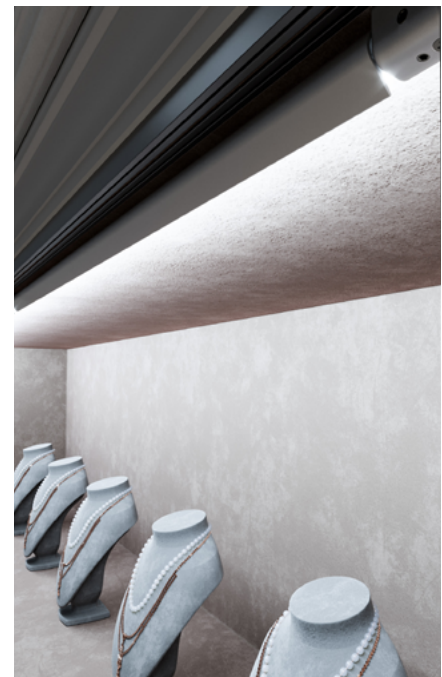
## WIREWAY HOLE DIA.

**4.2mm**



PROFILE	ANTIGLARE	LENSES	MOUNTING HARDWARE	LENGTH
 <p><b>4100</b> - Profile, alu</p>	 <p><b>AS</b> - Antiglare shield</p>  <p><b>NO</b> - No lens</p>	 <p><b>PR</b> Prime lens</p>	 <p><b>MG</b> - Universal end cap</p> <p>- End cap serves as mounting hardware and can be installed either magnetically or with screws.</p>	<p>Length, up to 32 in</p> <p>To request a luminaire longer than 32", please contact your local representative</p> <p>All luminaires over 32" will require mid supports and a custom shop drawing.</p>
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"><b>4100</b></div> <p>PROFILE</p>	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;">-</div> <p>ANTIGLARE SHIELD</p>	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"><b>PR</b></div> <p>LENS</p>	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"><b>MG</b></div> <p>MOUNTING HARDWARE</p>	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;">-</div> <p>LENGTH</p>

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 15px; height: 10px; background-color: #f4a460; border: 1px solid black; margin-right: 5px;"></span> <b>27</b> - 2700K</li> <li><span style="display: inline-block; width: 15px; height: 10px; background-color: #f4c996; border: 1px solid black; margin-right: 5px;"></span> <b>30</b> - 3000K</li> <li><span style="display: inline-block; width: 15px; height: 10px; background-color: #f4e1d9; border: 1px solid black; margin-right: 5px;"></span> <b>35</b> - 3500K</li> <li><span style="display: inline-block; width: 15px; height: 10px; background-color: #f4f2e1; border: 1px solid black; margin-right: 5px;"></span> <b>42</b> - 4200K</li> <li><span style="display: inline-block; width: 15px; height: 10px; background-color: #f4f9e1; border: 1px solid black; margin-right: 5px;"></span> <b>53</b> - 5300K</li> </ul>	<p><b>LP3</b> - 335 LM / 4.4W FT / 90+CRI</p>	<p><b>HW3</b> - Hardwire 3 FT</p> <p><b>HW6</b> - Hardwire 6 FT</p> <p><b>HW9</b> - Hardwire 9 FT</p> <p><b>HWX</b> - Hardwire custom FT</p> <p><b>NO</b> - No lead</p>	<p><b>I</b> - IP22 indoor dry location</p>	<p><b>A</b> - Non-dimming</p> <p><b>B</b> - ELV dimming 120V AC</p> <p><b>C</b> - ELV dimming 120/277 VAC**</p> <p><b>D</b> - 0/10V dimming 120/277 VAC</p> <p><b>E</b> - Non-dimming DC plug in</p> <p><b>F</b> - DMX</p> <p><b>G</b> - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</p> <p><b>I</b> - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</p> <p><b>J</b> - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</p> <p><b>K</b> - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</p> <p><b>NO</b> - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K without lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p>
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"><b>I</b></div> <p>USAGE</p>	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;">-</div> <p>POWER SUPPLY/CONTROL</p>				

